

KINDLING SHELF

Before you commence the assembly process we recommend that you read these instructions thoroughly beforehand to familiarise yourself with the assembly process and to also check that you have the correct components. If for any reason you need assistance, you can find our contact details on the final page of these instructions.


We highly recommend that any assembly is carried out on a flat, level surface if possible and that you use another person to assist you if necessary.

PACKAGE CONTENTS

1 x Kindling shelf
2 x End supports
1 x Optional centre support
65mm fixing screws

TOOLS REQUIRED

Electric screwdriver with No2 Pozidrive bit
Or No2 Pozidrive Screwdriver

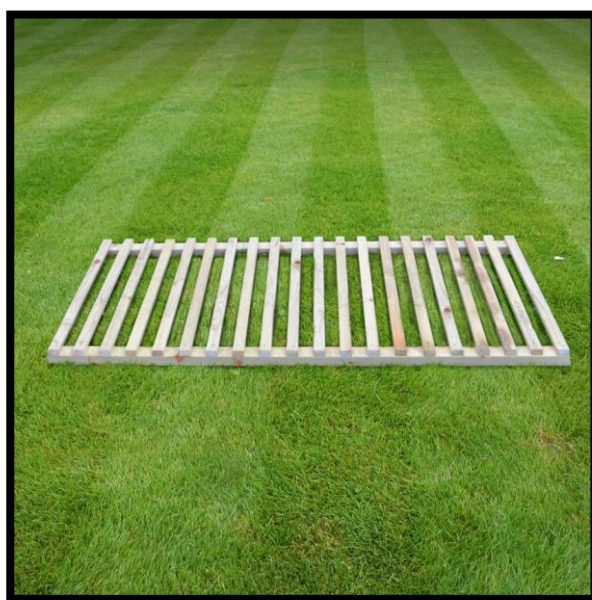

KINDLING SHELF

KINDLING SHELF

Step 1



If you are assembly a new log store proceed as normal until the stage where you are ready to add the roof as shown. For a pre-assembled log store simply remove the roof. **Please note: For single bay log stores the following steps can be carried out with the roof fitted.**

Step 2



Take one of the end supports and line it up at one end of your log store at the required height - remember to take account of the roof overhang. Using the side panel slats as a guide, hold the support level and screw into the side panel batten as shown.

Step 3



Ensuring that the support is still level, now secure it with another screw at the other end. Repeat this process for the other end, again using the slats in the panels to ensure that both supports are at the same height. If you have a single bay log store (Burley or Greetham) now proceed to step 6.

Step 4



Now fit the centre support by using the slats in the back panels as a guide and referring to the position of the end supports to get the correct fitting height. Screw into the back post after first ensuring that the front of the support sits flush against the side of the front post as shown in step 5.

KINDLING SHELF

Step 5



Now secure the front end of the centre support using same method used to secure it at the rear.

Step 6



Now lower the kindling shelf into place and attach or replace the roof as necessary. For slatted log stores the kindling shelf will need to be lowered vertically between the openings near the rear of the side panels (highlighted above) first.

WE HOPE THAT YOU FOUND YOUR PRODUCT QUICK AND EASY TO ASSEMBLE BUT IF NOT AND YOU REQUIRE ANY FURTHER ASSISTANCE OR HAVE ANY QUESTIONS YOU CAN CONTACT US BY TELEPHONE ON: **01778 440803**
EMAIL: INFO@RUTLANDCOUNTYGARDENFURNITURE.CO.UK
WWW.RUTLANDCOUNTYGARDENFURNITURE.CO.UK